

# EDGE™ Housing

1 rack unit, holds up to 12 EDGE modules or panels

CORNING

EDGE™ HD solutions are high-density preterminated optical cabling solutions offering industry-leading connector density. With unprecedented finger access, there is no need for additional tools enabling faster moves, adds and changes (MACs).

## Features and Benefits

### Universal wired components

Enable moves, adds and changes without polarity concerns; provide a simple migration path between 2-fibre and parallel optic applications

### Sliding drawers


Allow unprecedented finger access, easier jumper/harness routing and port identification

### Integrated strain-relief plate can rotate 90°

Allows for rear cable entry direction, as well as the traditional side cable entry

### Removable top covers on the 1 U and 2 U housings

Provide easier access to modules and panels

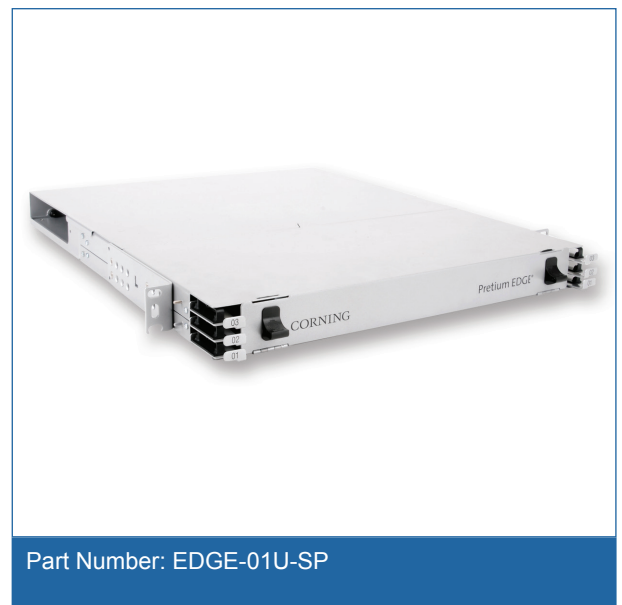

# EDGE™ Housing

1 rack unit, holds up to 12 EDGE modules or panels

CORNING

## Specifications

General Specifications	
Application	Data Centre, Data Centre LAN/SAN, Enterprise Networks
Product type	Fibre Optic Hardware
Mounting type	Rack Mount, Cabinet-mount
Mounting Technology	Adjustable depth settings
Access type	Front and rear access slidable
Lockable	Yes, rear side

Design - Hardware	
Housing type	EDGE™ HD
Height Unit	1U
Number of Panels per Housing	12
Housing Colour	Silver
Fibre Capacity	144
Cable Entry Direction	Rear
Cable entry type	Side brush entry
Colour	Silver
Number of modules	12

Mechanical Characteristics	
Dimensions (W x D x H)	432 mm x 561 mm x 44 mm (17 in x 22.1 in x 1.75 in)
Weight	6.4 kg (14 lb)

Chemical Characteristics	
RoHS	Free of hazardous substances according to RoHS 2002/95/EG

# EDGE™ Housing

1 rack unit, holds up to 12 EDGE modules or panels



## Ordering Information

Part Number	EDGE-01U-SP
Product Description	EDGE™ Housing, 1 rack unit, holds up to 12 EDGE modules or panels
EAN Code	4056418144528
Module Capacity	12
Trunk Capacity	12 (size 1 or 2)

## Shipping Information

Units Per Delivery	1/1
Packaging Dimensions (W x D x H)	565 mm x 646 mm x 171 mm (19 in x 22.125 in x 7.75 in)
Packing dimensions (L x W x H)	646 mm x 565 mm x 171 mm
Shipping Weight	8.2 kg (18 lb)



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY  
00 800 2676 4641 · FAX: +49 30 5303 2335 · [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2016 Corning Optical Communications. All rights reserved.